


INSTALLATION STEPS:

1. ATTACH P/N 608-100-9498 – 1/2 SCHRADER QUICK DISCONNECT COUPLING TO AIR OUTLET OF AIRGLADIATOR.
2. INSTALL 1/2 INCH SCHRADER NIPPLE ON 10 FT. LONG, V-20 AIR LINE INTO 608-100-9498 SCHRADER QD COUPLING.
3. INSTALL 1/2 INCH INDUSTRIAL INTERCHANGE QUICK DISCONNECT COUPLING ON 10 FT. LONG, V-20 AIR LINE INTO 1/2 INCH NIPPLE ON ANY BULLARD CAB OR AIRGUARD CLEAN-AIR-BOX.

(INSTALLATION IS NOW READY FOR AIR PRESSURE TO BE TURNED ON FOR THIS SYSTEM.)

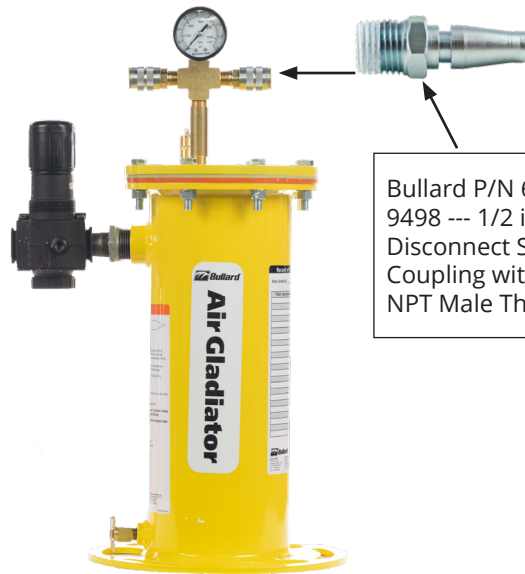

Bullard P/N 608-100-9498 --- 1/2 inch Quick Disconnect Schrader Coupling with 3/8-inch NPT Male Threads.



Bullard P/N V2010FT - 10 FT. Long - V-20 Airline Hose with 1/2 Schrader Nipple and 1/2 Industrial Interchange QD Coupling.



Bullard CAB30HA Clean-Air-Box (Shown Above as Example)

(NOTE: Clean Air Box is NOT supplied with the AG10FTCABKIT.)

Bullard AIRGLADIATOR – 2 OUTLETS (Shown Above as Example)
(NOTE: AirGladiator Filter is NOT supplied with the AG10FTCABKIT.)

Bullard Center
2421 Fortune Drive
Lexington, KY 40509 • USA
877-BULLARD (285-5273)
Tel: +1-859-234-6616
Fax: +1-859-246-0243

Americas Operations
1898 Safety Way
Cynthiana, KY 41031 • USA
877-BULLARD (285-5273)
Tel: +1-859-234-6616
Fax: +1-859-234-8987

Bullard GmbH
Dieselstrasse 8a
53424 Remagen • Germany
Tel: +49-2642 999980
Fax: +49-2642 9999829

Bullard Asia Pacific Pte. Ltd.
51 Changi Business Park
Central 2
#03-04 The Signature
Singapore 486066
Tel: +65 6745 0556